



**MODEL 'BR103D'  
PANEL MOUNT GAUGE**

- A durable Dry type utility gauge designed to look good from the front or back of the panel.
- These gauges are suitable for air, water, oil, gas or any other media not corrosive to brass.
- Other connection locations, mounting styles and accessories are also available.
- Ready for immediate shipment upon request.

**AVAILABLE DIAL SIZES:**

1½", 2", 2½", 3½"

**AVAILABLE CONNECTION SIZES:**

1/8"NPT on 1½" and 2" Dial Sizes

¼"NPT on 2" Thru 3½" Dial Sizes

**GENERAL SPECIFICATIONS:**

Chrome Plated Steel Case & Bezel  
(Stainless Steel Case Available)

Brass Socket And Movement

Phosphor Bronze Bourdon Tube


Dry Non-Fillable

3-2-3 % Accuracy

Ambient Temperature: -50 to 160°F

**DIAL SCALE:**

**DUAL SCALE: PSI & BAR (x100=kPa) STANDARD**  
**OTHER: BY SPECIAL REQUEST**

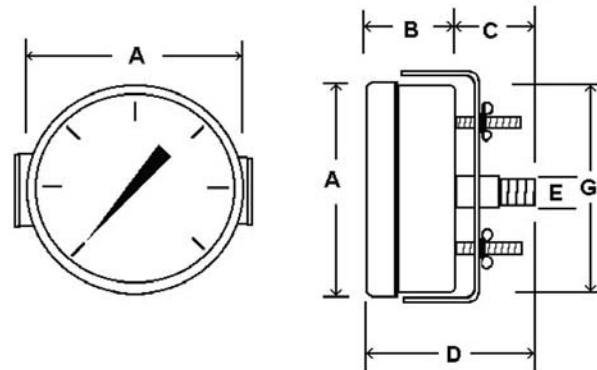

RANGE	CODE	MAJOR INC.	MINOR INC.
30/0" VAC	A	5" hg	.5" hg
30/0/15	CB	10"hg / 5 psi	1"hg / .5 psi
30/0/30	CC	10"hg / 10 psi	1"hg / 1 psi
30/0/60	CD	10"hg / 10 psi	2"hg / 1 psi
30/0/100	CE	30"hg / 20 psi	5"hg / 2 psi
30/0/150	CF	30"hg / 20 psi	5"hg / 2 psi
30/0/300	CH	30"hg / 50 psi	10"hg / 5 psi
0/15	B	2 PSI	.2 PSI
0/30	C	5 PSI	.5 PSI
0/60	D	10 PSI	1 PSI
0/100	E	20 PSI	2 PSI
0/160	F	20 PSI	2 PSI
0/200	G	40 PSI	5 PSI
0/300	H	50 PSI	5 PSI
0/400	I	50 PSI	5 PSI
0/600	K	100 PSI	10 PSI
0/1000	M	200 PSI	20 PSI
0/1500	N	200 PSI	20 PSI
0/2000	O	400 PSI	50 PSI
0/3000	P	500 PSI	50 PSI
0/5000	R	1000 PSI	100 PSI
0/6000	S	1000 PSI	100 PSI
0/10,000	U	2000 PSI	200 PSI

		A	B	C	D	G	E
1½" DIAL	In.	1.82"	1.03"	.61"	1.64"	1.59"	1/8" or 1/4 MNPT
	MM	46	26	15	42	40	
2" DIAL	In.	2.31"	1.17"	.73"	1.90"	2.02"	1/4 MNPT
	MM	59	30	18.5	48.5	51	
2½" DIAL	In.	2.68"	1.19"	.76"	1.95"	2.46"	1/4 MNPT
	MM	68	30	19	50	63	
3½" DIAL	In.	3.97"	1.19"	.83"	2.02"	3.59"	1/4 MNPT
	MM	101	30	21	51	91	