



MODEL 'BR104D' PANEL MOUNT GAUGE

- A durable Dry type utility gauge designed to look good from the front or back of the panel.
- These gauges are suitable for air, water, oil, gas or any other media not corrosive to brass.
- Other connection locations, mounting styles and accessories are also available.
- Ready for immediate shipment upon request.

AVAILABLE DIAL SIZES:

1½", 2", 2½", 3½", 4

AVAILABLE CONNECTION SIZES:

1/8"NPT on 1½" and 2" Dial Sizes

¼"NPT on 2" Thru 4" Dial Sizes

GENERAL SPECIFICATIONS:

Chrome Plated Steel Case & Bezel
 (Stainless Steel Case Available)

Brass Socket And Movement

Phosphor Bronze Bourdon Tube

Dry Non-Fillable


3-2-3 % Accuracy

Ambient Temperature: -50 to 160°F

DIAL SCALE:

DUAL SCALE: PSI & BAR (x100=kPa) STANDARD

OTHER: BY SPECIAL REQUEST

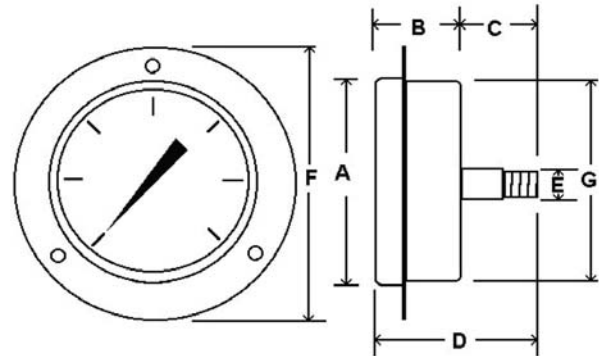

| RANGE | CODE | MAJOR INC. | MINOR INC. |
|-----------|------|----------------|---------------|
| 30/0" VAC | A | 5" hg | .5" hg |
| 30/0/15 | CB | 10"hg / 5 psi | 1"hg / .5 psi |
| 30/0/30 | CC | 10"hg / 10 psi | 1"hg / 1 psi |
| 30/0/60 | CD | 10"hg / 10 psi | 2"hg / 1 psi |
| 30/0/100 | CE | 30"hg / 20 psi | 5"hg / 2 psi |
| 30/0/150 | CF | 30"hg / 20 psi | 5"hg / 2 psi |
| 30/0/300 | CH | 30"hg / 50 psi | 10"hg / 5 psi |
| 0/15 | B | 2 PSI | .2 PSI |
| 0/30 | C | 5 PSI | .5 PSI |
| 0/60 | D | 10 PSI | 1 PSI |
| 0/100 | E | 20 PSI | 2 PSI |
| 0/160 | F | 20 PSI | 2 PSI |
| 0/200 | G | 40 PSI | 5 PSI |
| 0/300 | H | 50 PSI | 5 PSI |
| 0/400 | I | 50 PSI | 5 PSI |
| 0/600 | K | 100 PSI | 10 PSI |
| 0/1000 | M | 200 PSI | 20 PSI |
| 0/1500 | N | 200 PSI | 20 PSI |
| 0/2000 | O | 400 PSI | 50 PSI |
| 0/3000 | P | 500 PSI | 50 PSI |
| 0/5000 | R | 1000 PSI | 100 PSI |
| 0/6000 | S | 1000 PSI | 100 PSI |
| 0/10,000 | U | 2000 PSI | 200 PSI |

| | | A | B | C | D | F | G | E |
|-------------|-----|-------|-------|------|-------|-------|-------|--------------------|
| 1½" DIAL | In. | 1.82" | 1.03" | .61" | 1.64" | 2.47" | 1.61" | 1/8" MNPT |
| | MM | 46 | 26 | 15 | 42 | 63 | 41 | |
| 2" DIAL | In. | 2.31" | 1.17" | .73" | 1.90" | 2.81" | 2.02" | 1/8 or 1/4 MNPT |
| | MM | 59 | 30 | 18.5 | 48.5 | 71 | 51 | |
| 2½" DIAL | In. | 2.68" | 1.19" | .76" | 1.95" | 3.44" | 2.46" | 1/4 MNPT |
| | MM | 68 | 30 | 19 | 50 | 87 | 63 | |
| 3½" DIAL | In. | 3.97" | 1.19" | .83" | 2.02" | 4.30" | 3.59" | 1/4 MNPT |
| | MM | 101 | 30.2 | 21 | 51 | 109 | 91 | |
| 4" DIAL | In. | 4.09" | 1.18" | .83" | 2.02" | 5.20" | 3.90" | 1/4 MNPT |
| | MM | 104 | 30 | 21 | 51 | 132 | 99 | |