



MODEL 'BR201D' DRY GAUGES

Our '200' series gauge line is a high quality line of stainless steel case, brass internal gauges. These gauges come complete with removable bezels, adjustable pointers, glass lens and 1.5% accuracy.


This gauge is typically used on hydraulic & pneumatic systems as well as any commercial or industrial application not corrosive to brass and bronze wetted parts. The removable bezel and adjustable pointer make minor adjustments a breeze – so that its possible to keep your gauge as accurate as it can be at all times.

SPECIFICATIONS:

- Available Dial Sizes: 2 ½"
- Stainless Steel Case And Bezel
- Available Connection Sizes: 1/4"MNPT
- Brass Internals & Connection
- Phosphor Bronze Bourdon Tube
- Glass Lens
- Adjustable Pointer
- Dry, Liquid Fillable.
- Accuracy: 2 ½" Dial Size = ANSI GRADE A (1.5 % FS)
- Dual Scale: PSI & Bar (x100=kPa)
(Other dials available, call for details)
- Ambient temperature: DRY: -30°F to 180°F
FILLED: 30°F to 160°F



RANGE	CODE	MAJOR INC.	MINOR INC.
30/0" VAC	A	5	0.5
30/0/15	CB	5	0.5
30/0/30	CC	10	1
30/0/60	CD	10	1
30/0/100	CE	20	2
30/0/150	CF	20	2
30/0/300	CH	50	10
0/15	B	2	0.2
0/30	C	5	0.5
0/60	D	10	1
0/100	E	20	2
0/160	F	20	2
0/200	G	40	4
0/300	H	50	5
0/400	I	50	5
0/500	J	100	10
0/600	K	100	10
0/800	L	100	10
0/1000	M	200	20
0/1500	N	200	20
0/2000	O	400	50
0/3000	P	500	50
0/4000	Q	500	50
0/5000	R	1000	100
0/6000	S	2000	200
0/10,000	U	2000	200
0/15,000	V	2000	200

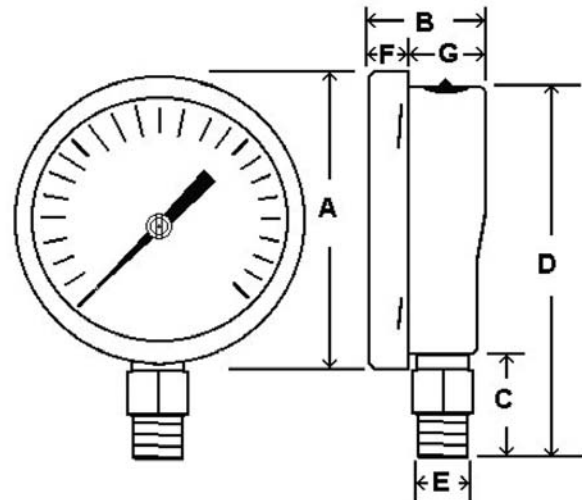

		A	B	C	D	E	F	G
2½" DIAL	In.	2.73"	1.35"	1.07"	3.55"	1/4"	.52"	.83"
	MM	70	34	27	90	NPT	13	21

Some ranges not available in all dial sizes, please call with your particular application.