



BLUE RIBBON CORP.


MODEL 'BR302L' BACK CONNECTED ALL STAINLESS GAUGES

Our '300' series gauge line is a high quality line of stainless steel gauges. Hermetically sealing the gauge prevents dust, dirt or other contaminants from entering the case of the gauge and attacking the movement or internals of the gauge. Keeping out such contaminants prolongs the life of the gauge.

This gauge is typically used in chemical processing or food processing applications as well as any commercial or industrial applications where stainless steel components are required.

SPECIFICATIONS:

- Available Dial Sizes: 1 ½", 2", 2 ½" and 4"
- Available Connection Sizes:
 - 1/8"(M)NPT on 1 ½" and 2"
 - 1/4"(M)NPT on 2", 2 ½" and 4"
- Stainless Steel Case And Bezel
- SS Internals & Connection
- 316SS Bourdon Tube
- Liquid Filled (Dry Available)
- Accuracy: 1 ½", 2", 2 ½" Dial = 1.6 %
4" Dial = 1 %
- Dual Scale: PSI & Bar (x100=kPa)
- Single Scale available
- Ambient temperature: FILLED: 30°F to 160°F
DRY: -30°F to 180°F

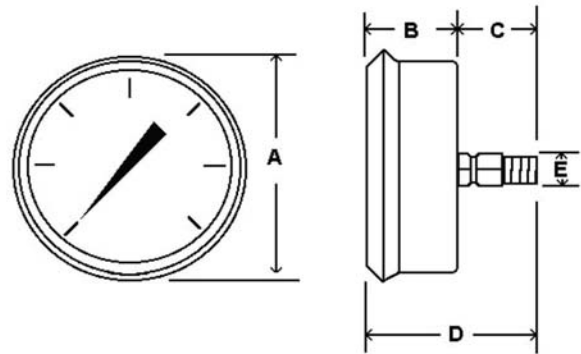

RANGE	CODE	MAJOR INC.	MINOR INC.
30/0" VAC	A	5	0.5
30/0/15	CB	5	0.5
30/0/30	CC	10	1
30/0/60	CD	10	1
30/0/100	CE	20	2
30/0/150	CF	20	2
30/0/300	CH	50	10
0/15	B	2	0.2
0/30	C	5	0.5
0/60	D	10	1
0/100	E	20	2
0/160	F	20	2
0/200	G	40	5
0/300	H	50	5
0/400	I	50	5
0/600	K	100	10
0/1000	M	200	20
0/1500	N	200	20
0/2000	O	400	50
0/3000	P	500	50
0/5000	R	1000	100
0/10,000	U	1000	100
0/15,000	V	2000	200

		A	B	C	D	E	F	G
1 ½" DIAL	In.	1.88"	1.06"	.89"	1.95"	1/8"	2.63"	1.63
	MM	48	27	23	50	(M)NPT	67	42
2" DIAL	In.	2.23"	1.09"	.71"	1.99"	1/8" or	2.81"	2.00
	MM	57	28	23	51	(M)NPT	72	51
2 ½" DIAL	In.	2.80"	1.28"	1.19"	2.46"	1/4"	3.48"	2.50
	MM	71	33	30	63	(M)NPT	88	64
4" DIAL	In.	4.32"	1.63"	1.14"	2.77"	1/4"	5.20"	3.87
	MM	110	42	29	71	(M)NPT	132	98

Blue Ribbon reserves the right to make product improvements and amendments to the product specifications stated throughout this brochure without prior notification. Please contact the factory on all critical dimensions and specifications for verification.

A5BR-302L.00 Rev A