



MODEL 'BR311D' ALL STAINLESS GAUGES


Our '311D' series gauge line is designed for process applications where 1 % accuracy and calibration via an adjustable pointer are desired to monitor important pressures accurately.

This gauge has been specifically designed with higher-end process applications in mind and are used on any process systems as well as any commercial or Industrial application where stainless steel wetted parts are needed. These gauges also have laminated safety glass lens required where chemical wash downs are common and/or safety requirements demand shatter resistant glass lens.

SPECIFICATIONS:

- Available Dial Size: 2 1/2"
- Available Connection Sizes: 1/4"MNPT
- Stainless Steel Case And Bezel
- 316SS Tube & SS Internals
- 1 Piece Design Welded Socket
- Laminated Safety Glass Lens
- Hermetically sealed (Liquid Fillable)
- Accuracy: 1 % Full Scale
- Single Scale: PSI Only (Dual Scale Available by Request)
- Temperature: -40 to 190°F *

*(Note: Temperature can affect Accuracy & Lifespan)

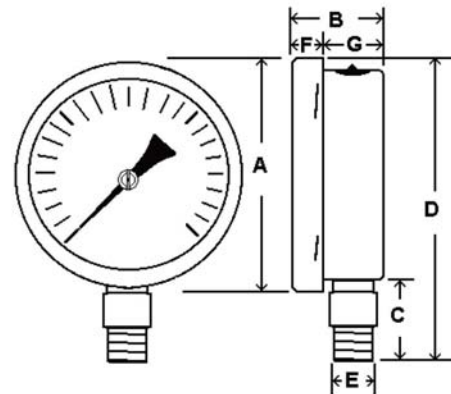

RANGE	CODE	MAJOR INC.	MINOR INC.
30/0" VAC	A	5	0.5
30/0/15	CB	5	0.5
30/0/30	CC	10	1
30/0/60	CD	10	1
30/0/100	CE	20	2
30/0/160	CF	20	2
30/0/300	CH	50	10
0/15	B	3	0.25
0/30	C	5	0.5
0/60	D	10	1
0/100	E	10	1
0/160	F	20	2
0/200	G	20	2
0/300	H	30	5
0/400	I	50	5
0/600	K	100	10
0/800	L	100	10
0/1000	M	100	10
0/1500	N	300	25
0/2000	O	200	20
0/3000	P	500	50
0/5000	R	500	50
0/6000	S	1000	100
0/10,000	U	1000	100
0/15,000	V	3000	250

DIMENSIONS		
A	In.	2.75"
	MM	70
B	In.	1.3"
	MM	33
C	In.	.94"
	MM	24
D	In.	3.5"
	MM	89
E	In.	1/4"
	MM	NPT
F	In.	.5"
	MM	13
G	In.	.8"
	MM	20