



MODEL 'BR4001' 4" DIAL ALL SS GAUGE

STANDARD SPECIFICATIONS:


- DIAL: 4" Diameter
- CASE: Stainless Steel
- LENS: Plastic With Gasket
- POINTER: Adjustable
- BOURDON TUBE: AISI 316 Stainless Steel
- SOCKET: AISI 316 Stainless Steel
- MOVEMENT: 304 SS Heavy Duty Bushed
- ACCURACY: 1 % Full Scale (ANSI Grade A)

STANDARD FEATURES:

- * Hermetically Sealed/Weather Proof
- * Welded Case and Connection
- * Liquid Fillable / No Kit Required
- * **Best Product Best Price Best Value!!**



RANGE	FIGURES	MINOR INC.
30/0 hg vac	5"	0.2"
30/0/15	10" & 5 PSI	1" & 0.5 PSI
30/0/30	10" & 5 PSI	1" & 0.5 PSI
30/0/60	10" & 10 PSI	2" & 1 PSI
30/0/100	10" & 20 PSI	2" & 1 PSI
30/0/150	10" & 30 PSI	5" & 2 PSI
30/0/200	10" & 50 PSI	5" & 2 PSI
30/0/300	10" & 50 PSI	10" & 5 PSI
30/0/600	10" & 100 PSI	10" & 10 PSI
0/15 PSI	3 PSI	0.2 PSI
0/30 PSI	5 PSI	0.2 PSI
0/60 PSI	5 PSI	0.5 PSI
0/100 PSI	10 PSI	1 PSI
0/160 PSI	20 PSI	1 PSI
0/200 PSI	20 PSI	2 PSI
0/300 PSI	50 PSI	2 PSI
0/400 PSI	50 PSI	2 PSI
0/600 PSI	50 PSI	5 PSI
0/800 PSI	100 PSI	5 PSI
0/1000 PSI	100 PSI	10 PSI
0/1500 PSI	250 PSI	10 PSI
0/2000 PSI	200 PSI	20 PSI
0/3000 PSI	500 PSI	20 PSI
0/5,000 PSI	1,000 PSI	50 PSI
0/10,000 PSI	1,000 PSI	100 PSI
0/15,000 PSI	2,500 PSI	100 PSI
0/20,000 PSI	2,500 PSI	200 PSI

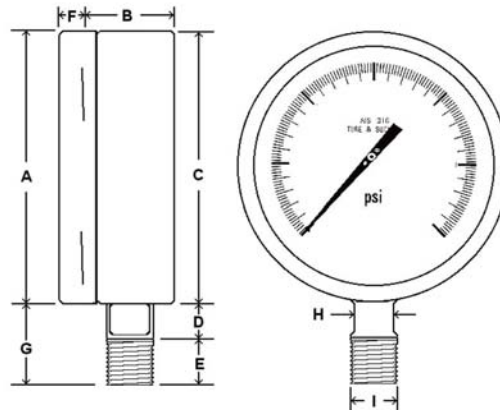

		A	B	C	D	E	F	G	H
1/2" or 1/4" NPT	In.	4.02"	1.93"	3.87"	.70"	.74"	.66"	1.38"	.68"
	MM	102	49	98.5	18	19	17	35	17