




# BLUE RIBBON Sales & Services Corp.

## DS - T SERIES DIAPHRAGM SEALS THREADED OFFLINE STYLE

The BR DS -T series is a multi-purpose diaphragm seal suitable for many applications and installation environments. The T- series seal is available in a wide variety of wetted parts and components. Upper housings are available in both welded and clamped configurations.



SPECIFICATIONS:	WETTED PARTS OPTIONS:
<ul style="list-style-type: none"> <li>• Diaphragm welded to upper housing</li> <li>• Available with replaceable diaphragm, gaskets between both housings</li> <li>• Instrument connection: 1/4" or 1/2" standard (others available)</li> <li>• Process connection: 1/4", 1/2", 3/4", 1" standard (others available)</li> <li>• Chrome plated steel or 316SS upper housing (others available)</li> <li>• Grade 8 galvanized steel or stainless steel bolts (others available)</li> <li>• Standard pressure rating 2500 psi maximum</li> <li>• High pressure model rated to 10,000 psi available</li> </ul>	<ul style="list-style-type: none"> <li>• Chrome plated carbon steel</li> <li>• 316SS</li> <li>• 304SS</li> <li>• 316L SS</li> <li>• 304L SS</li> <li>• Hastelloy C276, B2</li> <li>• Inconel 600, 625</li> <li>• Tantalum (diaphragm only)</li> <li>• Nickel</li> <li>• Monel 400</li> <li>• Titanium</li> <li>• Carpenter 20</li> <li>• Teflon</li> <li>• PVC</li> <li>• Kynar</li> <li>• Others available</li> </ul>

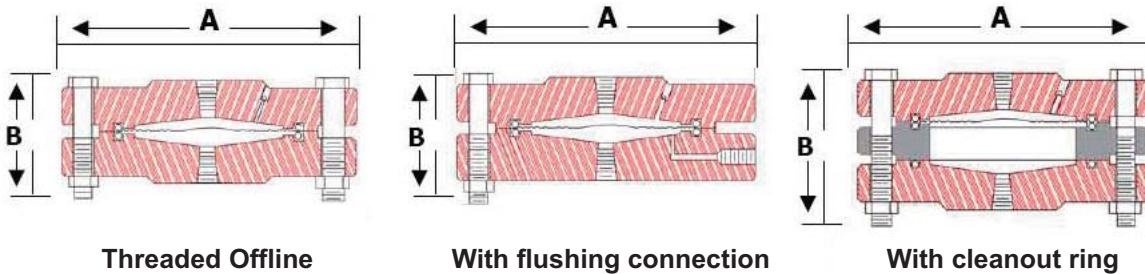

	A	B
Threaded Offline	4.0"	1.75"
With flushing connection	4.0"	1.75"
With cleanout ring	4.0"	2.125"

Blue Ribbon reserves the right to make product improvements and amendments to the product specifications stated throughout this brochure without prior notification. Please contact the factory on all critical dimensions and specifications for verification.

A5BR-DST.00